

Access controller with an **Eye**



Touch and call



Receives live View
and two way audio



Unlock remotely
from anywhere




All-in-One Door Access Controller

- 2MP super low lux CMOS camera
- Provides 180° panorama view
- Intelligent IR
- Built-in Mic and Speaker
- Built-in micro SD card slot (SD/SDHC) for local storage
- Touch Doorbell Button
- Access control function
- Ingress protection (IP66)
- DC 12V / PoE (IEEE 802.3at)


Application



Structure

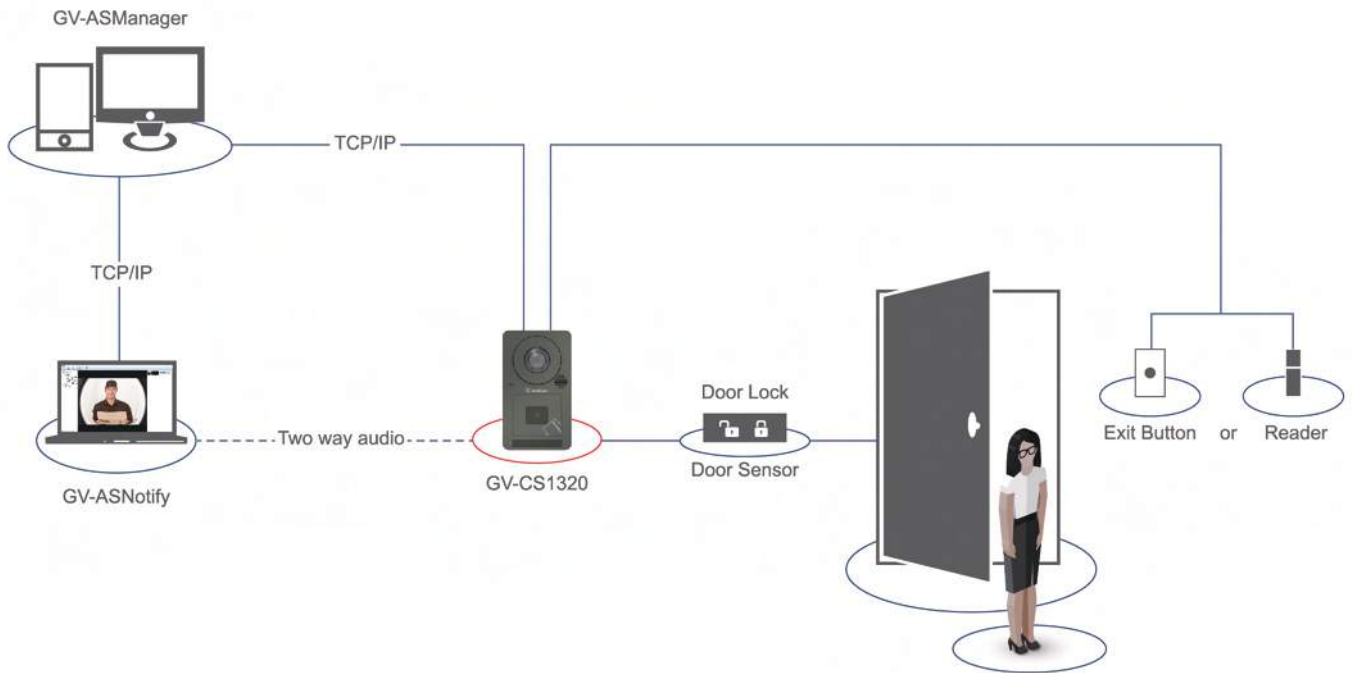

Our CS1320 provides entry level security, communication, and the option to start small and expand later. Select the ideal product solution for your building application.

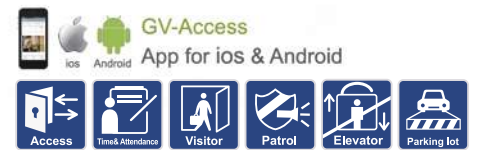

Overview



GV-CS1320 is a new single entrance access controller with a built-in 2MP wide angle lens. It is also a 13.56 MHz reader.

It provides both a sensor and an exit button for door access control system. You can connect up to two readers to GV-CS1320 for entry and exit applications. With the capability to store up to 40,000 cards, the card reader recognizes identification cards and grants access accordingly. It has TCP/IP communication interface to PC.

Programming of GV-CS1320 can be done from the software GV-ASManager through the RS-485 connection. Its built-in camera captures all angles of the entrance and transmits live view to GV-ASManager and GV-System through network.